

ETC S4 26 deg., w/ Iris, 750w HPL750

ETC S4 36 deg., w/ Iris, 750w HPL750

ETC S4 19 deg., w/ Iris, 750w HPL750

ETC S4 25-50 Zoom 750w HPL750

ETC S4 15-30 Zoom 750w HPL750

L&E MR16 - 6W / 3clic. Strip, 75w, EYC or EYP

ETC S4 Par Med. 575w HPL575

ETC S4 Par Wide 750w HPL750

ETC S4 ParNel 750w HPL750






Note: All S4 25/50 zooms and S4 Pars and ParNels have 3" color frame extenders installed

KEY:




IRIS: R21 5 2/139 58

Dimmer: 19

Color: Unit No. / Starting Address / Channel

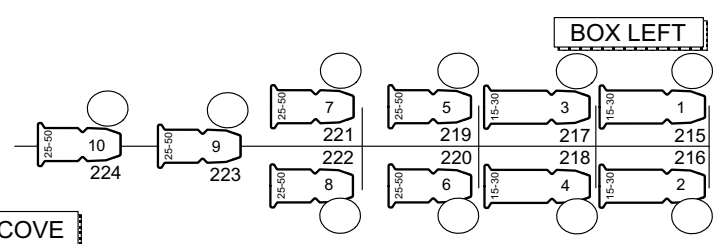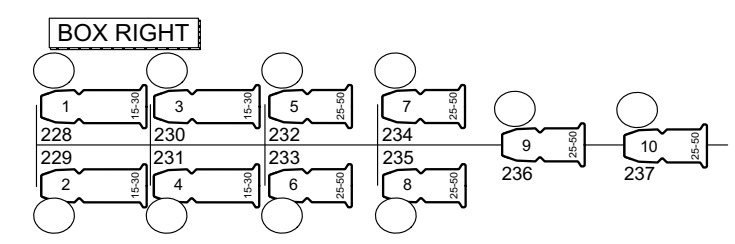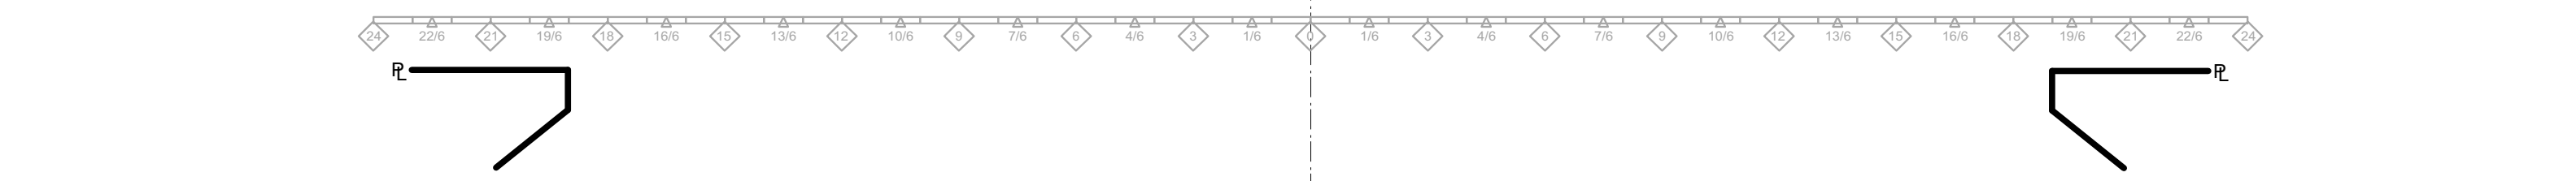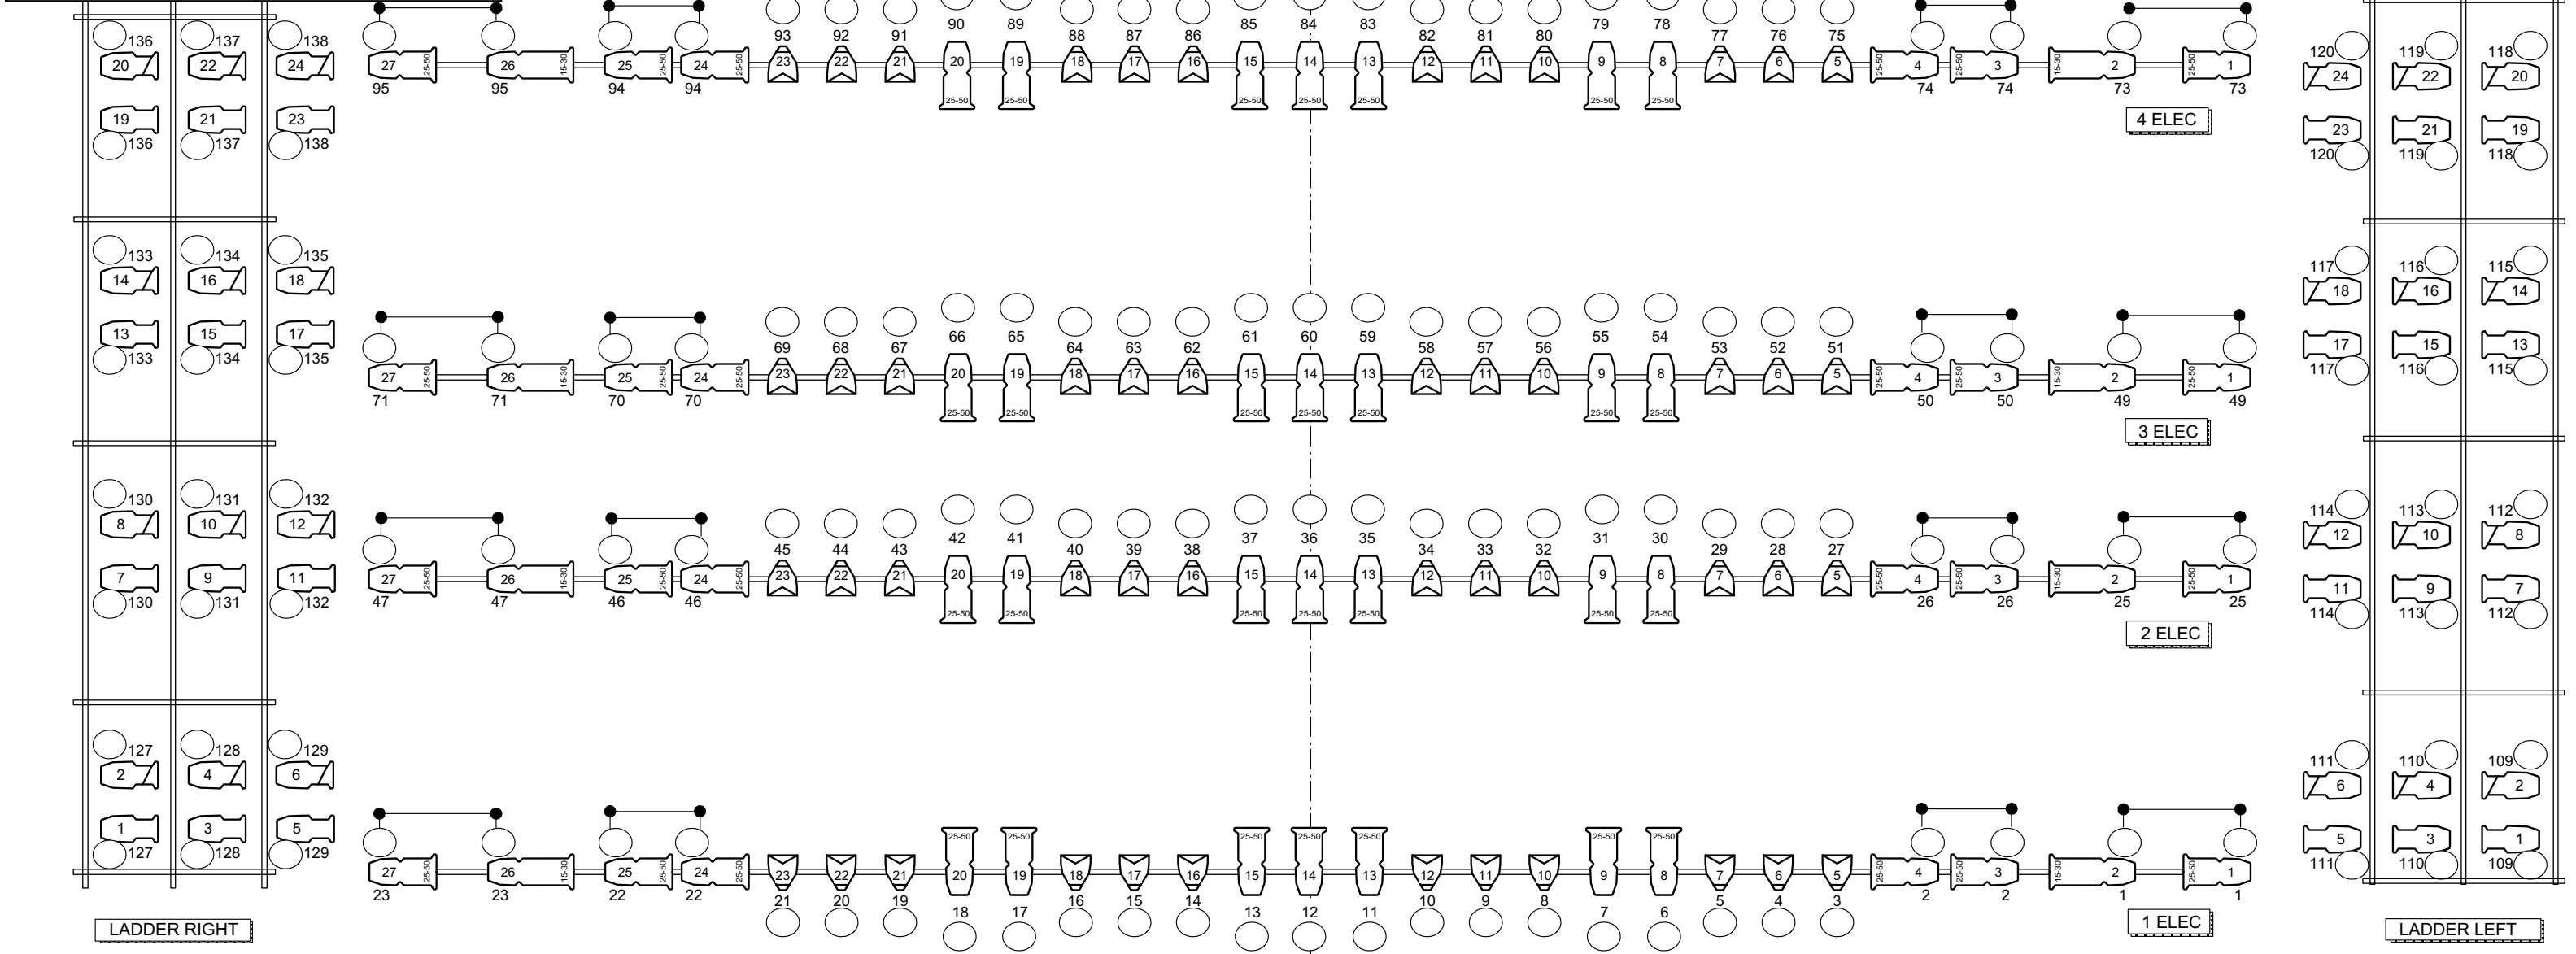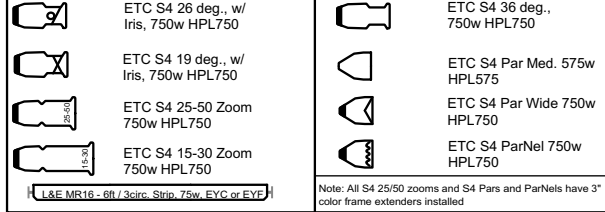



Event:

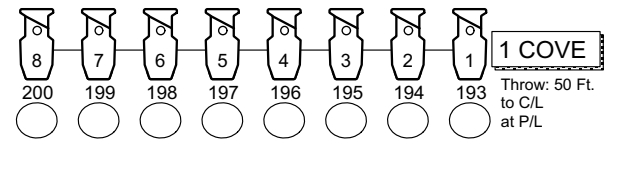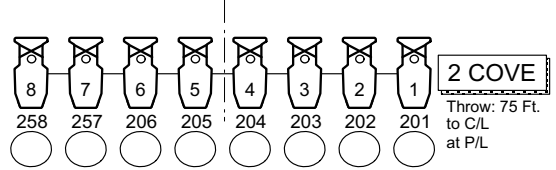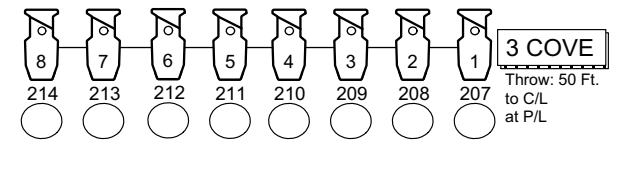

Whitman Hall Rep Plot









No Scale: Drawn By: Steve Bailey 2-06 / Revised 8-11

	ETC S4 26 deg., w/ Iris, 750w HPL750		ETC S4 36 deg., 750w HPL750
	ETC S4 19 deg., w/ Iris, 750w HPL750		PAR64 Wide 1000w FFS (L/L is Long Life - Q1000)
	ETC S4 25-50 Zoom 750w HPL750		ETC S4 Par Med. 575w HPL575
	ETC S4 15-30 Zoom 750w HPL750		ETC S4 Par Wide 750w HPL750
			ETC S4 ParNel 750w HPL750

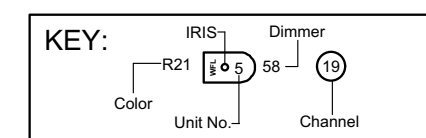

Note:

- Towers are shown in a size that allows attribute information to be readily shown
- Actual dimensions are: 76" H x 30" D x 18" W
- Design allows for supplemental S4 Par to be added to position between top 2 and lowest 2 units.
- Ea. tower has a 6 circuit cable bundle designed to plug into an adjacent floor pocket. A tower is thus designed to sit either on top of, or in front or immediately behind that wings floor pocket, to eliminate cableing between wings. The floor pockets are located in the center of wings 1,2 & 3 and as such all 8 of the towers work best when located in the center of the wing. As well, all towers get 2 each red LED spotting lights on the down and upstage verticals to guide dancers.

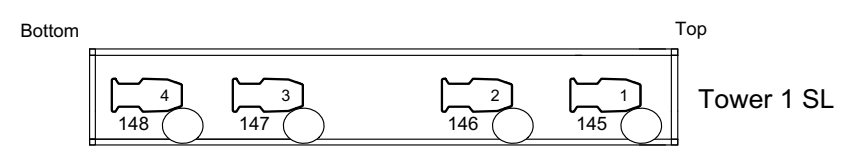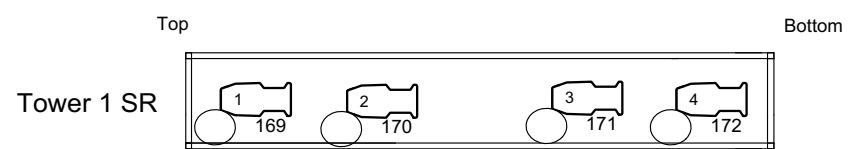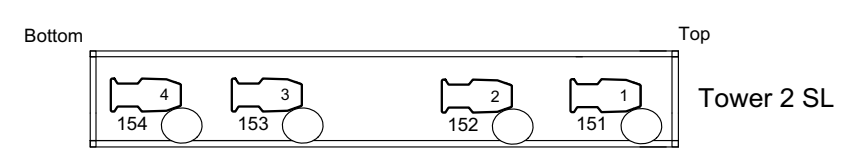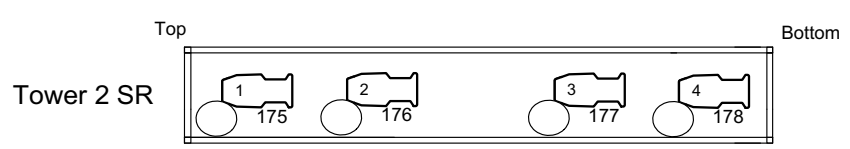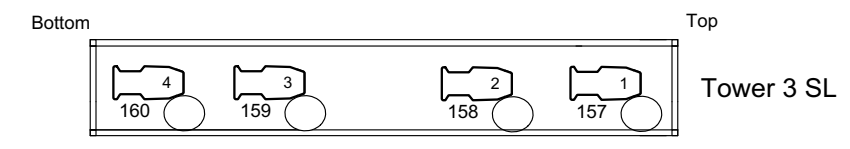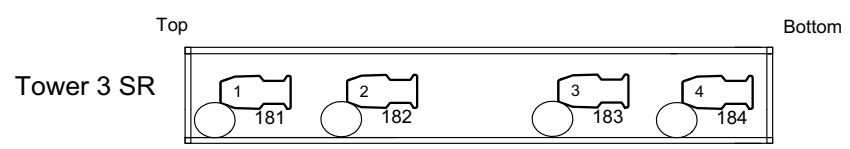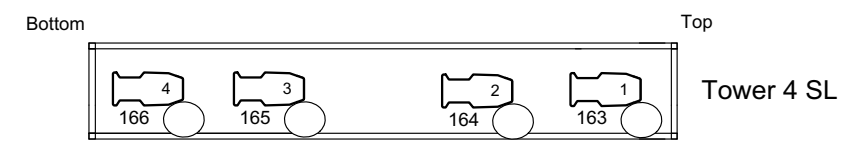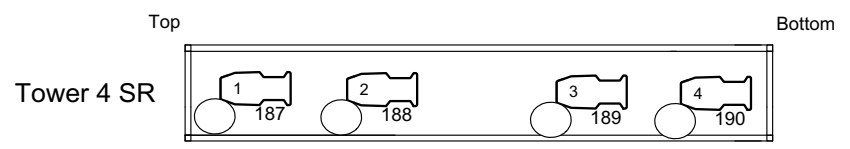

Event: